


CableFree

Wireless Excellence

CableFree Solutions Limited
Holly House, St Clare Business Park,
Holly Road, Hampton Hill, Middlesex TW12 1QQ
T: +44 (020) 8941 7975 E : info@cablefreesolutions.com
F: +44 (020) 8941 2410 W: www.cablefreesolutions.com

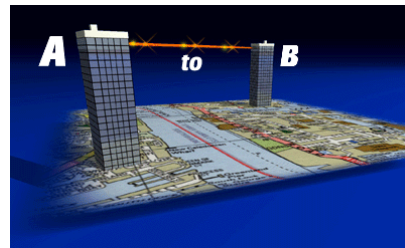

CableFree Hotspot Solution – Product Overview

System Features

- All-in-one Hotspot solution for public internet access
- Operates in 2.4 and/or 5.3-5.8GHz ISM band
- Built-in Authentication & Logon pages
- Tiered services for premium customers
- Contract and/or Pre-pay cards
- Walled-garden screens advertising service
- Single or Dual Radio options
- Indoor or outdoor-grade versions

Applications

- Hotspots for Hotels, Cybercafé, Coffee bars, Airports
- Hotspot overlay for Wireless ISP
- Internet access at conferences, sports, public or special events
- Fast Roll-out & Temporary Deployment



Accessories

Antennas	Wide range of Directional, Sectored and Omnidirectional antennas available
Radio Cards	2 nd radio card for resilience, high throughput, backhaul or hotspot applications
O/S Software	Higher level functions for Public Wireless LAN, Hotspot, etc
Mounting Brackets	Wall, Pole, Tower or Tripod mount options available
Management Suite	Full range of solutions including SNMP, LinkManager™, AlarmView™, ClusterManager™

All-in-One-Box Solution: Powerful Embedded Router Platform

CableFree Hotspots integrate are not cheap enterprise-grade WLAN components. They embody powerful carrier-class routers with advanced features normally not found in wireless bridges or access points. Such features include:

Hotspot Authentication, User Profiles, Logon Screens, Walled Garden, Cookies, RADIUS authentication, accounting, control of connection time • uplink and downlink bandwidth control on a per-user basis • IP Bridging • Layer3 IP Routing • Border Gateway Protocol (BGP) • Ethernet-over-IP (EoIP) interfaces • Virtual Router Redundancy Protocol (VRRP) • DHCP Client and Server • Network Address Translation (NAT)

Enhanced Wireless Performance

CableFree 802.11x radios offer major advantages over 'off-the-shelf' WiFi products. Examples are:

- Highly configurable – up to 2 radio cards – 'mix and match' 2.4/5GHz
- 108Mbps raw data rate using 'turbo mode' offers 25Mbps throughput.
- 3dB advantage over older 'Prism' based products – 'state-of-the art' radio technology
- Full duplex throughput by using dual wireless cards
- Sophisticated RadioOS software platform
- Hotspot features including Radius authentication and per-user bandwidth controls

Specifications

System Variant	W-Hotspot
Performance	
Range	Up to 500m outdoors, 100m indoors depending on antennas
Bandwidth	Up to 54Mbps (108Mbps Turbo mode)
Power Consumption	10W; 48V fed from Power-over-Ethernet injector; 115/230Vac;
Operating Temperature	-20...+60 deg C
Wireless	
Frequency	2.4GHz: 2.412-2.472 (5 MHz step, channels 1-13), 2484 (channel 14) 2.512-2.732 (20 MHz step, channels 15-26) - optional license required 5GHz: 5.150-5.350 (5 MHz step) 5.725-5.825 (5 MHz step) 5.47-5.725 GHz - optional license required
Radio Type	Direct Sequence Spread Spectrum (DSSS)
Modulation	2.4GHz: CCK (11, 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps); OFDM for data rate >20 Mbps 5GHz: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Operation Channels	11
RF Output Power	18dBm (125mW) – under software control
Sensitivity @FER=0.08:	54 Mbps OFDM -73 dBm; 48 Mbps OFDM -76 dBm; 36 Mbps OFDM -82 dBm; 24 Mbps OFDM -85 dBm; 18 Mbps OFDM -88 dBm; 12 Mbps OFDM -89 dBm; 11 Mbps OFDM -91 dBm; 9 Mbps OFDM -90 dBm; 6 Mbps OFDM -91 dBm; 5.5Mbps OFDM -92 dBm; 2 Mbps OFDM -93 dBm; 1 Mbps OFDM -94 dBm
Radio Data Rate	2.4GHz-b: 11, 5.5, 2, 1 Mbps, auto-fallback 2.4GHz-g (Normal mode): 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps, auto-fallback 2.4GHz-g (Turbo mode): 108,96,72,48,36,24,18,12 Mbps, auto-fallback 5GHz (Normal mode): 54, 48, 36, 24, 18, 12, 9, 6 Mbps, auto-fallback 5GHz (Turbo mode): 108, 96, 72 48, 36, 24, 18, 12 Mbps, auto-fallback
Compatibility	Proprietary modes plus back compatibility fully interoperable with IEEE 802.11a/b/g WiFi-compliant products
Radio Architecture	Support ad-hoc, peer-to-peer networks and infrastructure communication to wired Ethernet networks via Access Point
Security	64/128-bit WEP data encryption; WPA; Proprietary mode
Router Platform	
CPU	AMD x86-class 133MHz or 266MHz; 8MB SRAM; 64MB FLASH
System Software Management	RadioOS 2.9.x; Choice of license levels; Remotely Upgradeable Local and Remote configuration, control and administration via RS232, Telnet, HTTP, SNMP and Proprietary protocols
Resilience Features	Virtual Router Redundancy Protocol (VRRP) allows two complete hotspots to be configured for high-availability applications
Mechanical	
Dimensions (mm)	180x130x60mm
Connectors	External:RF: N-type Internal: 10/100 Ethernet: RJ45; RS232 console: DB9
Environmental Weight	IP66 2kg

Product Code	Description
W-HOTSPOT-O	CableFree 2.4/5.3/5.8GHz Hotspot including IP65-rated outdoor unit, pre-loaded software, Power-over-Ethernet injector with mains 115/230Vac input. Does not include Antennas, Ethernet or RF antenna cables.
W-HOTSPOT-I	CableFree 2.4/5.3/5.8GHz Hotspot including IP54-rated indoor unit, pre-loaded software, Power-over-Ethernet injector with mains 115/230Vac input. Includes 5dBi antenna. Does not include Ethernet cables.
W2Gxxx	2.4GHz Antenna options – see separate datasheet
W5Gxxx	5.3-5.8GHz Antenna options – see separate datasheet
WPCI-2.4	Optional second radio module 11Mbps 2.4GHz
WPCI-dual	Optional second radio module 54Mbps dual-band 2.4/5GHz